


WARNING SIGN
ORDER NON-STOCK & REF.
THIS STD DWG NO.

- WARNING SIGN NOTES:**
1. WARNING SIGN TO BE 3290 SILVER 3M ENGINEER GRADE BACKGROUND ON 0.080" 3105 SHEET ALUMINUM. THE WORD "WARNING" TO BE REVERSED SCREENED WITH SILVER LETTERS AND A RED SCOTCHCAL 3872 BACKGROUND. ALL OTHER LETTERING TO BE BLACK.
 2. WHERE ALL MAIN TRACKS AND CONTROLLED SIDINGS ARE NOT INCLUDED IN THE WARNING SYSTEM, THE WARNING SIGN IS TO BE MOUNTED ADJACENT TO THE TRAIN APPROACH WARNING SYSTEM CONTROLLER.

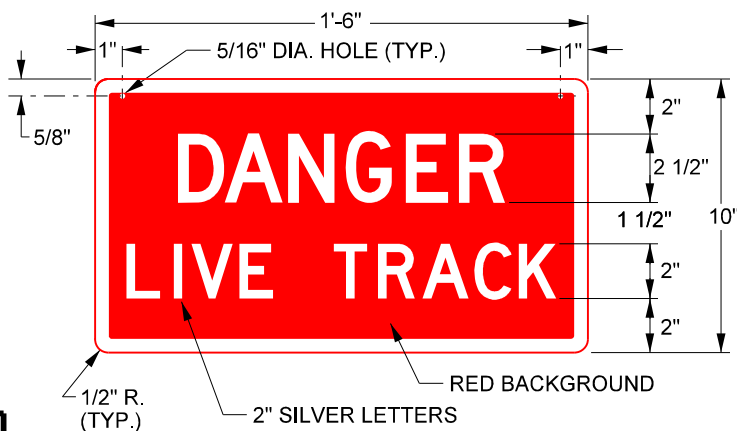

DANGER SIGN
ITEM NO. 393-2387

- DANGER SIGN NOTES:**
1. DANGER SIGN TO BE 0.90" POLY VINYL CARBIDE PLASTIC, REVERSE PRINTED ON BOTH SIDES WITH 3M #990-12 INK TO PRODUCE A RED BACKGROUND WITH WHITE COPY AND BORDER.
 2. SAFETY CHAIN TO BE 1/4" HIGH TEST STEEL, 2600 LBS. WORKING LOAD. THE SWIVEL EYE SAFETY SNAP IS 1/2" STEEL WITH A SPRING GATE, 750 LB. WEIGHT SUPPORT. THE CHAIN AND SNAP ARE TO BE SECURED AND INSTALLED BY RAILROAD MAINTENANCE OF WAY FORCES.
 3. EACH SIDE DOORWAY OF EVERY TRACK MOUNTED MAINTENANCE OF WAY MACHINE MUST BE EQUIPPED ONE "DANGER LIVE TRACK" SIGN. THE CHAIN SHALL BE SECURED ACROSS THE OPENING WHENEVER THE DOORWAY IS ADJACENT TO A LIVE TRACK.

4. FOR LETTERING, SEE STD DWG 0501

UNION PACIFIC RAILROAD ENGINEERING STANDARDS	
LIVE TRACK WARNING SIGNS	
	ADOPTED: SEP. 21, 2020 REVISED: FILE NO.: 0524
STD DWG	0524