

SIGN	COLOR	24" X 24" FLAG	12" X 15" FLAG**
YELLOW-RED FLAG	YELLOW & RED	393-4071	393-7797
YELLOW FLAG	SOLID YELLOW W/ BLACK BORDER	393-0773	393-0774
GREEN FLAG	SOLID GREEN	393-1545	393-1543
RED FLAG	SOLID RED	393-6106	393-6107


\*\*MUST USE 1/2" X 2" STEEL BAR FOR MOUNTING MINI FLAGS

FLAG MOUNTING NOTE:  
 FLAGS MAY BE SECURED TO ANY PROVED STAFF OR EXISTING  
 SIGN POST CONSISTENT WITH FLAG PLACEMENT INSTRUCTIONS  
 OUTLINED ON STD DWG 0532.


SIGN POST	ITEM NO.
SELF DRIVING	393-7798
RAIL MOUNTED	393-7799
1/2" X 2" X 48" STEEL BAR**	393-7790
TELESCOPING HINGED	393-7825
GALVANIZED POST	SEE DWG 0599
GALVANIZED POST HOLDER*	393-7807

\*HOLDER TO BE USED TO SUPPORT GALVANIZED  
 POST WHERE GROUND CONDITIONS REQUIRE.

\*\*TO BE USED FOR MINI FLAGS AS  
 WELL AS STANDARD FLAGS



### HOLE DETAIL

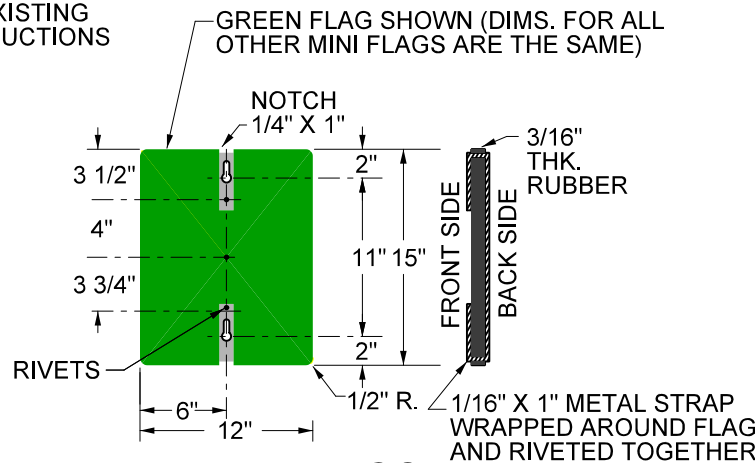


### MINI FLAGS

ONLY USE FOR TRACK CENTERS  
 13' - 15' PER STD DWG 0532

3/4" WIDE BLACK BORDER ON MINI  
 FLAG 1 1/4" WIDE BLACK BORDER  
 ON STANDARD FLAG

1/4" TYP.  
 OFFSET



### BORDER DETAIL

TO BE APPLIED ON SOLID  
 YELLOW FLAGS ONLY

### NOTES:

1. SEE RULES 5.4, 5.4.1 THRU 5.4.8 OF  
 GENERAL CODE OF OPERATING RULES AND  
 STD DWG 0532 FOR FLAG USE.
2. ALL MINI FLAGS TO BE CONSTRUCTED  
 USING 3/16" THICK BLACK RUBBER  
 SHEETING WITH 3-PLY CLOTH INSERTION  
 AND ENGINEERS GRADE REFLECTIVE  
 SHEETING.
3. ALL STANDARD FLAGS TO BE ASSEMBLED  
 USING 0.080" 3105 SHEET ALUMINUM AND  
 SHEETING AS FOLLOWS:

YELLOW-RED FLAG SIGN TO BE 3871  
 YELLOW AND 3872 RED 3M HIGH INTENSITY  
 BACKGROUND.

YELLOW FLAG SIGN TO BE 3871 YELLOW 3M  
 HIGH INTENSITY BACKGROUND WITH BLACK  
 BORDER AS SHOWN ON DETAIL.

GREEN FLAG SIGN TO BE 3877 GREEN 3M  
 HIGH INTENSITY BACKGROUND.

RED FLAG SIGN TO BE 3872 RED 3M HIGH  
 INTENSITY BACKGROUND.

4. ALL HOLES TO BE PER DETAIL.
5. ALL OUTSIDE RADII TO BE 1/2".

## UNION PACIFIC RAILROAD ENGINEERING STANDARDS

## FLAGS FOR TEMPORARY TRACK CONDITIONS



ADOPTED: SEP. 21, 2020  
 REVISED:  
 FILE NO.: 0531

STD DWG

0531

STD DWG  
 0531

YELLOW-RED FLAG SHOWN  
 (DIMS. FOR ALL OTHER STANDARD  
 FLAGS ARE THE SAME)

### STANDARD FLAGS

